

SHOWEREX™


PATENTED DESIGN & TECHNOLOGY

saving energy • heating or cooling • temperature transfer

SHOWEREX 1400

SHOWEREX 900

www.vaporotec.co.nz

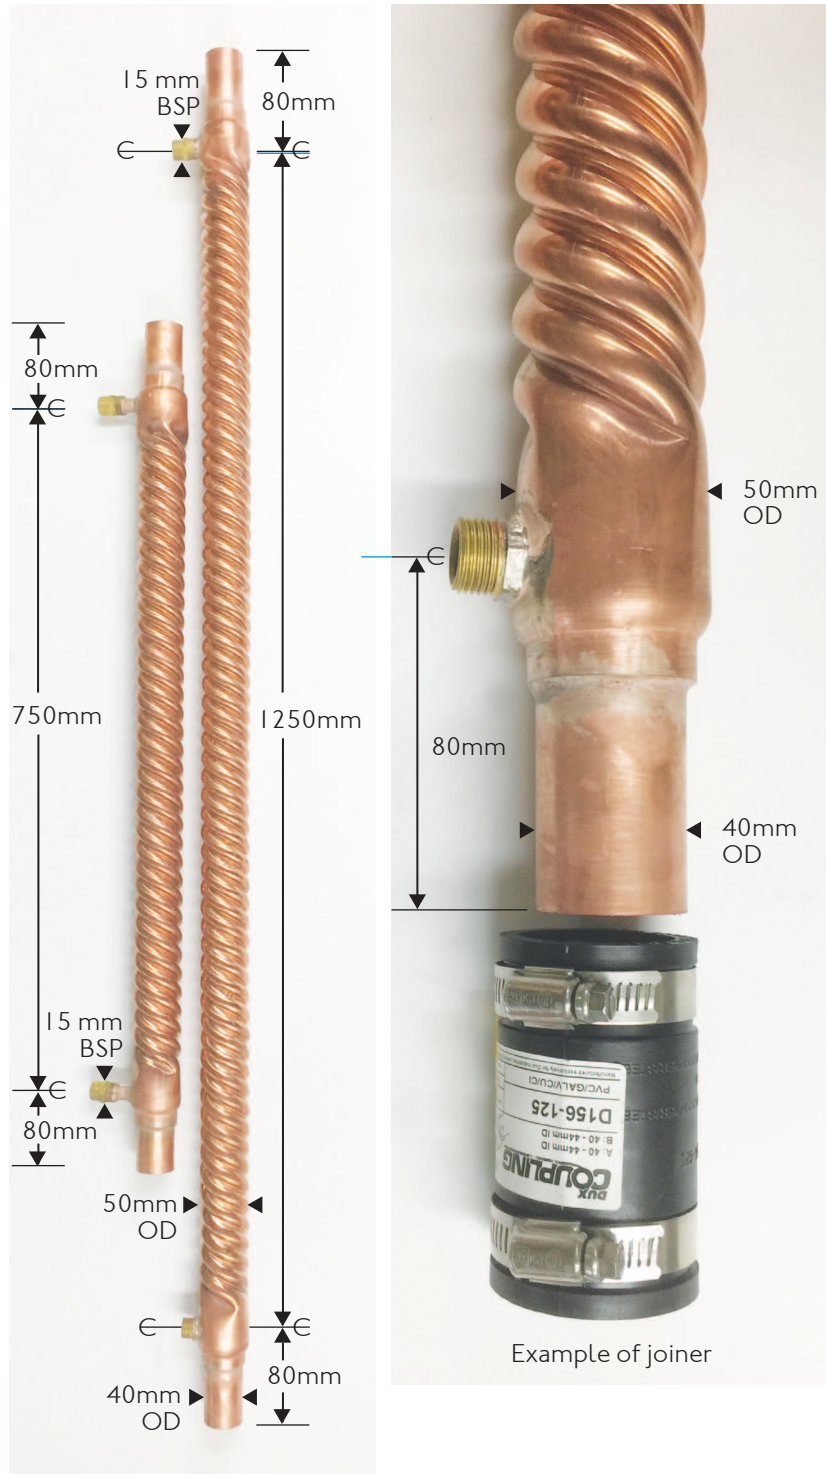

Inner tube (Primary)

Copper

Temperature range up to 320°C at 350Psi

Cleanable

Compact and light

Shell outer (Secondary)

Copper

Temperature range up to 320°C at 350Psi

Compact and light

- Uses the unique patented SHOWEREX tubing for ultimate efficiency
- Complies with NZ and Australian Plumbing Standards
- 5 Year Guarantee on materials and workmanship
- Can be placed in standard plumbing position of 40:1 and also vertically
- Overall lengths available between 900mm and 1400mm and with inner tube diameter of 40mm
- Significant savings on hot water usage
- Permanent fixture means savings with energy shower
- No mains pressure drop up to 10 l/min (see graphs on website)
- More pre-heated cold water used means more pressure at the shower rose in rural/low pressure systems
- Get more hot water usage from the cylinders